

AD-A193 878

DEVELOPMENT OF INDUCTIVE STORAGE PULSED POWER
GENERATORS(U) NAVAL RESEARCH LAB WASHINGTON DC
R J COMMISSO ET AL. 86 APR 88 NRL-MR-6129


1/1

UNCLASSIFIED

F/G 10/4

NL






MICROCOPY RESOLUTION TEST CHART
 U.S. GOVERNMENT PRINTING OFFICE

Naval Research Laboratory

Washington, DC 20375-5000



NRL Memorandum Report 6129

AD-A193 878

DTIC FILE COPY

Development of Inductive Storage Pulsed Power Generators

R.J. COMMISSO, J.R. BOLLER, G. COOPERSTEIN,
R.D. FORD, D.J. JENKINS AND J.C. KELLOGG

Plasma Physics Division

P.J. GOODRICH, D.D. HINSHELWOOD, W.H. LUPTON
AND B.V. WEBER

Jaycor, Vienna, VA 22180-2270

J.D. SHIPMAN, JR.

*Sachs/Freeman
Landover, MD 20785*

DTIC
ELECTE
APR 27 1988
S D

April 6, 1988

Approved for public release; distribution unlimited.

88 4 26 088

DISCLAIMER NOTICE

**THIS DOCUMENT IS BEST QUALITY
PRACTICABLE. THE COPY FURNISHED
TO DTIC CONTAINED A SIGNIFICANT
NUMBER OF PAGES WHICH DO NOT
REPRODUCE LEGIBLY.**

REPORT DOCUMENTATION PAGE				Form Approved OMB No. 0704-0188	
1a. REPORT SECURITY CLASSIFICATION UNCLASSIFIED			1b. RESTRICTIVE MARKINGS		
2a. SECURITY CLASSIFICATION AUTHORITY			3. DISTRIBUTION / AVAILABILITY OF REPORT Approved for public release; distribution unlimited.		
2b. DECLASSIFICATION / DOWNGRADING SCHEDULE			5. MONITORING ORGANIZATION REPORT NUMBER(S)		
4. PERFORMING ORGANIZATION REPORT NUMBER(S) NRL Memorandum Report 6129			7a. NAME OF MONITORING ORGANIZATION		
6a. NAME OF PERFORMING ORGANIZATION Naval Research Laboratory		6b. OFFICE SYMBOL (If applicable) Code 4770	7b. ADDRESS (City, State, and ZIP Code)		
6c. ADDRESS (City, State, and ZIP Code) Washington, DC 20375-5000			9. PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER		
8a. NAME OF FUNDING / SPONSORING ORGANIZATION ONR & DNA		8b. OFFICE SYMBOL (If applicable)	10. SOURCE OF FUNDING NUMBERS		
8c. ADDRESS (City, State, and ZIP Code) ONR-Arlington, VA 22217 DNA-Washington, DC 20305			PROGRAM ELEMENT NO (See page 11)	PROJECT NO 11	TASK NO (See page 11)
11. TITLE (Include Security Classification) Development of Inductive Storage Pulsed Power Generators					
12. PERSONAL AUTHOR(S) (See page 11)					
13a. TYPE OF REPORT Interim		13b. TIME COVERED FROM 10/86 TO 5/87		14. DATE OF REPORT (Year, Month, Day) 1988 April 6	
15. PAGE COUNT 11					
16. SUPPLEMENTARY NOTATION *Jaycor, Vienna, VA. 22180-2270 +Sachs/Freeman, Landover, MD 20785					
17. COSATI CODES			18. SUBJECT TERMS (Continue on reverse if necessary and identify by block number)		
FIELD	GROUP	SUB-GROUP	Opening switch power conditioning Inductive storage Plasma erosion opening switch Fuses		
19. ABSTRACT (Continue on reverse if necessary and identify by block number)					
<p>A pulse generator, Pawn, has been assembled at the Naval Research Laboratory. It employees inductive energy storage and opening switch power conditioning techniques with high energy density capacitors as the primary energy store. The capacitor bank stores 1 MJ at 44 kV. The energy stored in the capacitor bank is transferred to a vacuum storage inductor in 20 μs. Wire fuses provide the first stage of pulse compression. Further pulse compression is obtained from a plasma erosion opening switch.</p> <p>Initial results are encouraging. Nearly 0.1 TW of electrical power was delivered to an electron-beam diode load in a 100-ns FWHM pulse. A peak voltage at the load of \approx 350 kV represents a factor of \approx 14 voltage gain over the initial, 25-kV bank voltage.</p>					
20. DISTRIBUTION / AVAILABILITY OF ABSTRACT <input checked="" type="checkbox"/> UNCLASSIFIED/UNLIMITED <input type="checkbox"/> SAME AS RPT <input type="checkbox"/> DTIC USERS			21. ABSTRACT SECURITY CLASSIFICATION UNCLASSIFIED		
22a. NAME OF RESPONSIBLE INDIVIDUAL Robert J. Commisso			22b. TELEPHONE (Include Area Code) (202) 767-2468		22c. OFFICE SYMBOL Code 4770.2

10. SOURCE OF FUNDING NUMBERS

PROGRAM ELEMENT NO.	PROJECT NO.	TASK NO.	WORK UNIT ACCESSION NO.
ONR NONE	NONE	NONE	47-0878-08
DNA 62715H	NONE	T99ZAXLA-00038	DN-320-094

12. PERSONAL AUTHORS

Commisso, R.J., Boller, J.R., Cooperstein, G., Ford, R.D., Goodrich,* P.J.,
 Hinshelwood,* D.D., Jenkins, D.J., Kellogg, J.C., Lupton,* W.H.,
 Shipman, Jr. J.D. and Weber,* B.V.

CONTENTS

I. INTRODUCTION	1
II. SYSTEM DESCRIPTION	1
III. CHARACTERIZATION OF FUSE OPERATION	2
IV. FUSE DRIVEN PEOS EXPERIMENT	2
V. SUMMARY	3
ACKNOWLEDGEMENTS	3
REFERENCES	3
DISTRIBUTION	5

Accession For	
NTIS CRA&I	<input checked="checked" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By	
Distribution/	
Availability Codes	
Dist	Availability/ or Special
A-1	



Development of Inductive Storage
Pulsed Power Generators

R.J. Comisso, J.R. Boller, C. Cooperstein,
R.D. Ford, P.J. Goodrich, D.D. Minshelwood,
D.J. Jenkins, J.C. Kellogg, V.H. Lupton,
J.D. Shipman, Jr., and B.V. Veber

Naval Research Laboratory
Washington, DC
USA

ABSTRACT

A pulse generator, Pavn, has been assembled at the Naval Research Laboratory. It employs inductive energy storage and opening switch power conditioning techniques together with high energy density capacitors as the primary energy store. The capacitor bank stores 1 MJ at 44 kV. The energy stored in the capacitor bank is transferred to a vacuum storage inductor in 20 μ s. Wire fuses provide the first stage of pulse compression. Further pulse compression is obtained from a plasma erosion opening switch.

Initial results are encouraging. Nearly 0.1 TV of electrical power was delivered to an electron-beam diode load in a 100-ns FWHM pulse. A peak voltage at the load of \approx 350 kV represents a factor of \approx 14 voltage gain over the initial, 25-kV bank voltage.

I. Introduction

Inductive energy storage in combination with opening switch power conditioning techniques offers several attractive features for pulsed power applications when compared with conventional, capacitive technology [1-3]. These advantages include compactness and low cost of the primary energy store. Also, because the voltage is high only during the last stages of the power conditioning sequence, some complexities associated with high voltage, such as oil insulated Marx banks, water filled pulse forming lines, and power limiting interfaces, are eliminated. The technical difficulty has always been obtaining the required power conditioning for practical, pulsed power applications, i.e., obtaining > 1 -TV, < 100 -ns pulses. With inductive storage, the power conditioning must be accomplished by a sequence of opening switches electrically in parallel with each other and the load. Each successive switch opens faster, resulting in higher and higher voltage. The challenge is to understand the physics governing the opening switch behavior well enough to design a system for which the interaction between the system components produces the desired power pulse.

An experimental, inductive storage, pulsed power generator, "Pavn" [4-5], has been assembled at the Naval Research Laboratory (NRL) using a newly developed low voltage, compact capacitor bank [6] as the primary store (1 MJ at 44 kV). The nominal 20- μ s current pulse available from the discharge of this bank energizes the vacuum storage inductance. Wire fuses [1,3-5,7] provide the first stage of pulse compression. Further pulse compression is obtained from a plasma erosion opening switch (PEOS) [8-11].

Preliminary results are encouraging. Nearly 0.1 TV of electrical power was delivered to an electron-beam (e-beam) diode load in a pulse of

100-ns full width at half maximum (FWHM). A factor of \approx 14 voltage gain over the initial, 25-kV bank voltage was achieved.

In Sec. II a description of the Pavn device and a discussion of its electrical operation are presented. Results demonstrating the fuse performance are discussed in Sec. III. In Sec. IV, preliminary, non-optimized results in which a fuse driven PEOS was coupled to an e-beam diode are reviewed. The work is summarized in Sec. V.

II. System Description

The system components are identified in Fig. 1. The pulse generator comprises a capacitor bank, a vacuum coaxial inductor attached to the capacitor bank via parallel plates, a low voltage vacuum feedthrough (not shown), a fuse array contained within a pressurized gas enclosure, a vacuum flashover closing switch that can be command or self-triggered, a vacuum opening switch (PEOS), and an e-beam diode load. The capacitor bank is divided into four submodels, each containing five, 52- μ f capacitors connected in parallel in a low inductance (\approx 70 nH) configuration. At the maximum rated charge voltage of \approx 44 kV, one capacitor stores \approx 50 kJ. Each submodel is connected to the common parallel plate transmission line in series with an \approx 14-m Ω , stainless steel safety resistor and a high energy, pressurized, railgap switch. The coaxial energy storage inductor is made of aluminum tubing with welded flanges and connects to a load coupling "tee." This tee section provides mounting surfaces for connecting two coaxial fuse enclosures and the coaxial output assembly. The assembly as shown in Fig. 1 contains the vacuum flashover switch (VFS), the vacuum opening switch (PEOS), and the e-beam load. The latter two components were replaced by an electrolytic resistor when testing the fuse opening switch stage alone. The diagnostics consisted of a Rogowski coil to measure the capacitor bank current, two B probes in the vacuum inductive store region, four B probes in the fuse tee vacuum

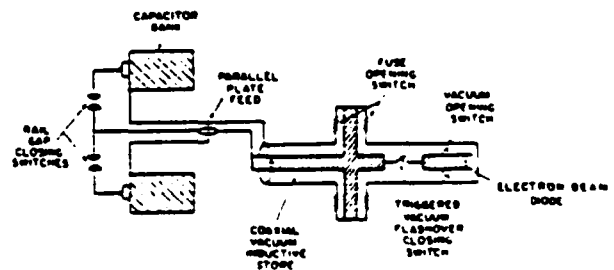


Figure 1. Schematic illustration of Pavn System.

region (2 for each package), two \bar{a} probes between the VFS and PEOS, four \bar{a} probes on the capacitor side of the PEOS and four \bar{a} probes on the load side of the PEOS. A resistive voltage divider was used to measure the fuse voltage. For experiments with diodes, an inductive voltmeter provided a direct measurement of the load voltage.

A schematic diagram of the equivalent electrical circuit for Pavn is shown in Fig. 2. The total bank capacitance, represented by C, is 1026 μ F. The series resistance, $R_s = 4.7$ m Ω , is made up of R_{sk} , the internal resistance of the capacitors and switches (S_1) and the parallel safety resistors ($= 3.6$ m Ω), plus R_{skin} , the skin resistance of the conductors associated with the transmission plate and coaxial inductor. The internal inductance of the bank, L_b , includes the switches and transmission plates and is estimated to be $= 40$ nH. The calculated inductance of the coaxial storage inductor is $L_{STORE} = 70$ nH. The parallel leg of the circuit represents the fuse assembly with inductance L_f and a variable resistor $R_f(t)$ symbolizing the time-dependent resistance of the fuse. The calculated inductance of a single fuse assembly for a 25-cm long fuse is $L_f = 70$ nH. This value becomes 35 nH when a second identical fuse assembly is connected at the tee section.

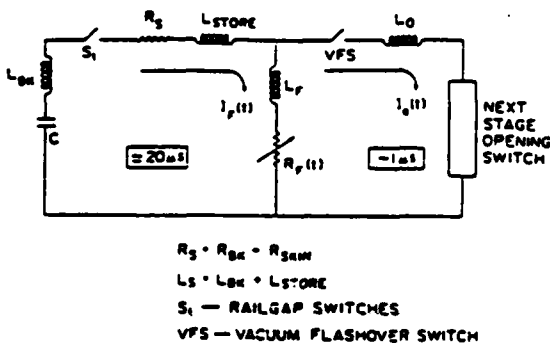


Figure 2. Equivalent circuit for Pavn System.

The capacitor bank is initially charged to a voltage of 20 - 44 kV. When it is discharged by closure of the railgap switches it produces a quasi-sinusoidal pulse of current $I_b(t)$ in the storage inductor and fuse array. Just before the fuse opens the VFS is closed. The voltage pulse resulting from the increasing fuse resistance then transfers current $I_f(t)$ from the fuse into the output loop of the circuit. The output loop is shown in the circuit as an inductance L_0 in series with an arbitrary element representing a fast opening switch in parallel with a load, or an electrolytic resistor.

III. Characterization of Fuse Operation

The first stage of pulse compression is achieved using wire fuses. Development work for the fuse and fuse package used on Pavn is described elsewhere [4-5]. The fuse is a non-linear resistive circuit element. As more energy is dissipated in the form of joule heating of the fuse wires, the fuse undergoes a phase change from solid to liquid to gas, with an accompanying increase in its resistance. The balance of energy dissipated in the fuse is crucial. Too much dissipated energy drives the fuse into a very low resistance plasma. This may result in a breakdown condition prohibiting any further current transfer or a restrike upon further voltage amplification in the power conditioning sequence. If too little energy is dissipated, the fuse never reaches the

highly resistive gaseous state desired for rapid transfer of current. As discussed in several of the references (e.g., 1, 2, 4, 5, 7) for a given time to fuse vaporization there exists a value of the fuse energy density (dissipated energy per unit volume of fuse) for which the required current transfer is achieved. Therefore, the fuse size and system parameters must be matched for optimum performance, i.e., fastest current transfer or, equivalently, highest voltage.

The performance of the capacitor bank and fuse stage with a triggered VFS is illustrated in Fig. 3. These data were obtained with a capacitor bank voltage of 40 kV (800 kJ stored energy), a 43-nH output inductance, and an 11-m Ω electrolytic resistor in place of the next stage opening switch of Fig. 2. Each of the two fuse packages consisted of 86 parallel copper wires, each 50-cm long. The time-dependent load current has a 10-90 risetime of 0.9 μ s and peaks at 1.4 MA. This represents a pulse compression ratio (energizing time for inductor with no fuse/risetime of current into load) of ≈ 20 . The 200 kV peak fuse voltage represents a voltage gain, defined as the ratio of peak voltage across the fuse to the initial capacitor voltage, of 5.

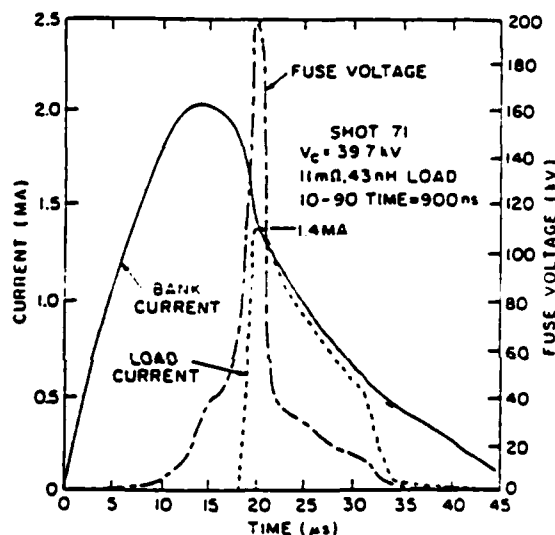


Figure 3. Data obtained at 40 kV charge using an 11-m Ω dummy load and a triggered vacuum flashover output switch.

The excellent fuse reproducibility is illustrated in Fig. 4, which is a six-shot overlay of the measured fuse voltage as a function of time. The standard deviation in peak fuse voltage is $< 4\%$ and in time-to-peak is $< 1\%$.

IV. Fuse Driven PEOS Experiment

The PEOS is a fast, high power, vacuum opening switch [8-11]. It consists of plasma sources that inject a flowing plasma through an array of rods into the region between the inner and outer conductors (see Fig. 1) filling the annular region over a limited axial length (≈ 10 cm). The plasma sources are fired several microseconds before the VFS is closed so that when the VFS closes the PEOS isolates the e-beam diode from the system. The PEOS must conduct long enough to allow transfer of current out of the fuse stage and then open, generating sufficient voltage to drive electron emission in diode, which is initially an open circuit.

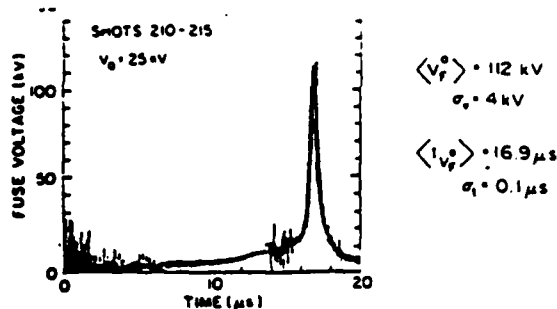


Figure 4. Overlay of six consecutive fuse voltage records illustrating fuse reproducibility.

Detailed operation of the PEOS can be found elsewhere (cf 8-11 and references therein). Briefly, the plasma is injected into the switch region several microseconds before the voltage associated with the fuse is switched to the PEOS cathode via the VFS. As long as the PEOS current remains below a predictable value, which depends on only the plasma parameters and switch geometry, the plasma acts as a good conductor. The conduction occurs through a non-neutral region, called a sheath or gap, at the cathode in a bipolar space-charge-limited fashion /8/ with the electron component emanating from the cathode and the ion component provided by the injected plasma. When the switch current becomes high enough that the bipolar space-charge condition cannot be satisfied by the ions from the injected plasma, the gap widens, providing more ions. This is called the erosion phase. When the switch current increases to the point where the average electron Larmor radius is comparable with the gap size, the electron lifetime in the gap increases and as a result the space-charge condition is modified in such a way that even more ions are required. This is called the enhanced erosion phase and it is during this phase that the gap widens very quickly. A high voltage is generated across the gap and a substantial fraction of current is diverted to the load. The switch is totally open when the magnetic insulation phase is reached. This occurs at a value of current for which the average electron Larmor radius is less than the gap size and all the current reaches the load.

Summarized in Fig. 5 are preliminary results from an experiment in which a fuse driven by the capacitor bank charged to 25 kV transferred current into a PEOS that, in turn, was coupled to an e-beam diode. Plotted as a function of time are the load voltage, V_L , current, I_L , power, P_L , and energy, E_L . The zero of time corresponds to the initiation of current in the fuse and the VSF was triggered at $t_{50} = 17.25$ μ s. Roughly 5 kJ of energy was delivered to the diode in an ≈ 85 -ns FWHM pulse. The peak power was ≈ 0.07 TW. Note that the peak diode voltage of ≈ 350 kV (measured directly with an inductive voltmeter) represents a total voltage gain over the initial bank voltage of ≈ 14 . This factor results from a gain of ≈ 4 from the fuse and ≈ 3.5 from the PEOS. Filtered, time resolved x-ray diagnostics suggest that the diode voltage thus measured may be an underestimate of the actual voltage. Currently, work is underway directed at improving the system performance by characterizing, understanding, and optimizing the interaction between the fuse and PEOS.

V. Summary

A pulsed power generator employing inductive energy storage and opening switch power

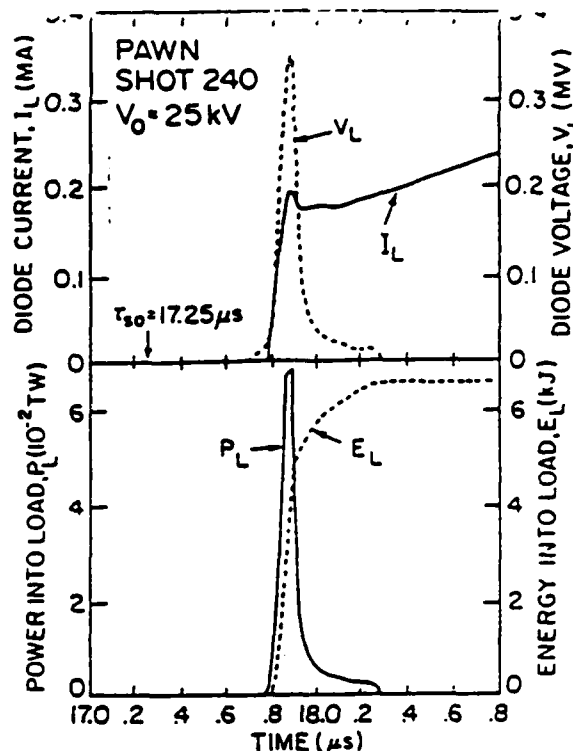


Figure 5. Initial results of experiments using a fuse driven PEOS coupled to an e-beam diode.

conditioning techniques has been assembled at NRL and is now operational. Initial, non-optimized results with the PEOS are encouraging. Nearly 0.1 TV of electrical power is delivered to an electron beam diode in a < 100 -ns FWHM pulse. The peak diode voltage is ≈ 350 kV, a factor of ≈ 14 voltage gain over the initial, 25-kV bank voltage. Work is now underway to improve this performance.

ACKNOWLEDGEMENTS

The authors gratefully acknowledge the expert technical assistance of E. Featherstone, R. Fisher, F. Hollis, R. Lanham and J. Jacques.

This work was supported in part by the Defense Nuclear Agency and the Office of Naval Research.

*Jaycor, Vienna, VA.

**Sachs/Freeman, Landover, MD.

References

1. P.F. Ottinger, R.J. Comisso, V.B. Lupton and J.D. Shipman, Jr., 5th IEEE Pulsed Power Conference, Arlington, VA (1985), M.F. Rose and P.J. Turchi, Eds., IEEE Cat. No. 85C2121-2, p. 12.
2. J. Shannon, M. Wilkinson, R. Miller, and Otis Cole, 5th IEEE Pulsed Power Conference, Arlington, VA (1985), M.F. Rose and P. Turchi, Eds. IEEE Cat. No. 85C2121-2, p. 16.
3. R.E. Reinovsky, V.L. Baker, Y.G. Chen, J. Holmes, and E.A. Lopez, 4th IEEE Pulsed Power Conference, Albuquerque, NM (1983), T.H. Martin and M.F. Rose, Eds., IEEE Cat. No. 83CH1908-3, p. 196.

Cooperstein, J.M. Grossmann, D.D. Jenkins, J.D.
Lupton, J.M. Neri, P.F. Ottinger, and J.D.
Shipman, Jr., NRL Memorandum Report 5852 (1986).

5. G. Cooperstein, J.R. Boller, R.J. Comisso, R.D. Ford, J.M. Grossmann, D.D. Hinshelwood, D.J. Jenkins, J.C. Kellogg, V.H. Lupton, R.A. Meger, D. Mosher, J.M. Neri, P.F. Ottinger, J.D. Shipman, Jr., and B.V. Veber, 6th International Conference on High Power Particle Beams, Kobe, Japan (1986), C. Yamanaka, Ed., p. 842.
6. J. Shannon, P. Krickhuhn, R. Dethlefsen, O. Cole, and H. Kent, 5th IEEE Pulsed Power Conference, Arlington, VA (1985), M.F. Rose and P.J. Turchi, Eds., IEEE Cat. No. 85C2121-2, p. 26.
7. C. Maisonnier, J.G. Linhart, C. Gourlan, Rev. Sci. Instrum. 37, 1380 (1966).
8. P.F. Ottinger, Shyke A. Goldstein, and R.A. Meger, J. Appl. Physics 56, 774 (1984).
9. R.J. Comisso, G. Cooperstein, R.A. Meger, J.M. Neri, P.F. Ottinger and B.V. Veber, in Advances in Pulsed Power Technology, M. Kristiansen and A. Guenther, Eds., Plenum (1987).
10. B.V. Veber, J.R. Boller, D.G. Colombant, R.J. Comisso, G. Cooperstein, J.M. Grossmann, D.D. Hinshelwood, R.A. Meger, D. Mosher, J.M. Neri, V.F. Oliphant, P.F. Ottinger, V.E. Scherrer, S.J. Stephanakis, and F.C. Young, 6th International Conference on High Power Particle Beams, Kobe, Japan (1986), C. Yamanaka, Ed., p. 851.
11. D.D. Hinshelwood, J.R. Boller, R.J. Comisso, G. Cooperstein, R.A. Meger, J.M. Neri, P.F. Ottinger, and B.V. Veber, Appl. Phys. Lett. 49, 1635 (1986).

DISTRIBUTION FOR DNA SPONSORED WORK

Director Defense Nuclear Agency Washington, DC 20305 Attn: TISI Archives 1 copy TITL Tech. Library 3 copies J. Z. Farber (RAEV) 1 copy G. Fisher 1 copy C. Schubert 1 copy E. E. Stobbs 1 copy	Commander Harry Diamond Laboratory 2800 Powder Mill Rd. Adelphi, MD 20783 (CNWDI-INNER ENVELOPE: ATTN: DELHD-RBH) Attn: DELHD-NP 1 copy DELHD-RCC-J.A. Rosando 1 copy DRXDO-RBH- J. Agee 1 copy DRXDO-TI-Tech Lib. 1 copy
Air Force Office of Scientific Research Physics Directorate olling AFB, DC 20332 Attn: H. Pugh 1 copy R.J. Barker 1 copy	Defense Technical Information Center Cameron Station 5010 Duke Street Alexandria, VA 22314 Attn: T.C. 2 copy
Air Force Weapons Laboratory, AFSC irtland, AFB, NM 87117 Attn: NTYP (W. L. Baker) 1 copy	JAYCOR, Inc. 1608 Spring Hill Rd. Vienna, VA 22180-2270 Attn: D. D. Hinshelwood 1 copy B. V. Weber 1 copy
Atomic Weapons Research Establishment uilding H36 ldermaston, Reading RG 7 4PR nited Kingdom Attn: J. C. Martin 1 copy	Kaman Tempo 810 State Street (P.O. Drawer QQ) Santa Barbara, CA 93102 Attn: DASIAC
Boeing Company, The P.O. Box 3707 Seattle, WA 98124 Attn: Aerospace Library 1 copy	Lawrence Berkeley Laboratory Berkeley, CA 94720 Attn: D. Keefe 1 copy
Brookhaven National Laboratory pton, NY 11973 Attn: A. F. Maschke 1 copy	Lawrence Livermore National Laboratory P.O. Box 808 Livermore, CA 94550 Attn: Tech. Info. Dept. L-3 1 copy D. J. Meeker
MO/EN orton AFB, CA Attn: ENSN 1 copy	Los Alamos National Laboratory P.O. Box 1663 Los Alamos, NM 87545 Attn: M. Gillispie/Theo. Div. 1 copy
Cornell University thaca, NY 14850 Attn: D. A. Hammer 1 copy R. N. Sudan 1 copy	Massachusetts Institute of Technology Cambridge, MA 02139 Attn: R. C. Davidson 1 copy G. Bekefi 1 copy

Maxwell Laboratories, Inc.
9244 Balboa Avenue
San Diego, CA 92123
Attn: M. Montgomery

1 copy

Mission Research Corporation
1400 San Mateo Blvd. SE
Albuquerque, NM 87108
Attn: B. B. Godfrey

1 copy

National Science Foundation
Mail Stop 19
Washington, DC 20550
Attn: D. Berley

1 copy

Naval Research Laboratory
Addressee: Attn: Name/Code

Code 2628 - TID Distribution 22 copies
Code 1001 - T. Coffey 1 copy
Code 4000 - W. Ellis 1 copy
Code 4040 - J. Boris 1 copy
Code 4700 - S. L. Ossakow 26 copies
Code 4701 - I. M. Vitkovitsky 1 copy
Code 4704 - C. Kapetanakis 1 copy
Code 4720 - J. Davis 1 copy
Code 4730 - S. Bodner 1 copy
Code 4740 - W. Manheimer 1 copy
Code 4760 - B. Robson 1 copy
Code 4770 - G. Cooperstein 10 copies
Code 4770.1 - F. C. Young 1 copy
Code 4770.2 - R. Commisso 20 copies
Code 4771 - P. Ottinger 1 copy
Code 4771 - J. Grossmann 1 copy
Code 4771 - J. Neri 1 copy
Code 4773 - S. J. Stephanakis 1 copy
Code 4773 - R. A. Meger 1 copy
Code 4790 - D. Colombant 1 copy
Code 4790 - I. Haber 1 copy
Code 4790 - M. Lampe 1 copy
Code 6682 - D. Nagel 1 copy

Physics International Co.
2700 Merced Street
San Leandro, CA 94577
Attn: C. Stallings

1 copy

Pulse Sciences, Inc.
1615 Broadway, Suite 610
Oakland, CA 94612
Attn: S. Putnam

1 copy

DIRECTOR OF RESEARCH
U. S. NAVAL ACADEMY
ANNAPOLIS, MD 21402

2 COPIES

CODE 1220

R&D Associates
Suite 500
1401 Wilson Blvd.
Arlington, VA 22209
Attn: P. J. Turchi

1 copy

R&D Associates
P.O. Box 9695
Marina Del Rey, CA 90291
Attn: C. MacDonald

1 copy

SAI
8400 W. Park Ave.
McLean, VA 22102
Attn: A. Drobot

1 copy

Sandia National Laboratories
P.O. Box 5800
Albuquerque, NM 87185
Attn: T. Martin/1250
J. P. Vandevender/1200
D. L. Cook/1260

1 copy

1 copy

1 copy

Spire Corporation
P.O. Box D
Bedford, MA 01730
Attn: R. G. Little

1 copy

Stanford University
SLAC
P.O. Box 4349
Stanford, CA 94305
Attn: W. B. Herrmannsfeldt

1 copy

University of California
Irvine, CA 92717
Attn: N. Rostoker

1 copy

University of Washington
Dept. of Nuclear Engineering
BF-10
Seattle, WA 98115
Attn: F. Ribe

1 copy

U.S. Department of Energy
Division of Inertial Fusion
Washington, DC 20545
Attn: L. E. Killion
M. Sluyter
R. L. Schriever

1 copy

1 copy

1 copy

U.S. Department of Energy
P.O. Box 62
Oak Ridge, TN 37830

1 copy

Records

1 copy

END

DATE

FILMED

7-88

Dtic